



Mini High-Speed CAN System Basis Chip for Partial Networking

UJA1168ATK


Last Updated: Mar 7, 2024

The UJA1168ATK is a mini high-speed CAN system basis chip (SBC) containing an ISO 11898-2:2016 and SAE J2284-1 to SAE J2284-5 compliant HS-CAN transceiver supporting CAN FD up to 5 Mbit/s together with a 5 V/100 mA supply for a microcontroller. It also features a watchdog and a serial peripheral interface (SPI).

The UJA1168ATK can be operated in very-low-current standby and sleep modes and supports CAN partial networking by means of a selective wake-up function. A dedicated implementation of the partial networking protocol called “FD-passive” has been embedded as well.

A number of configuration settings are stored in non-volatile memory, allowing the SBC to be adapted for use in a specific application.

UJA1168ATK Block Diagram Block Diagram

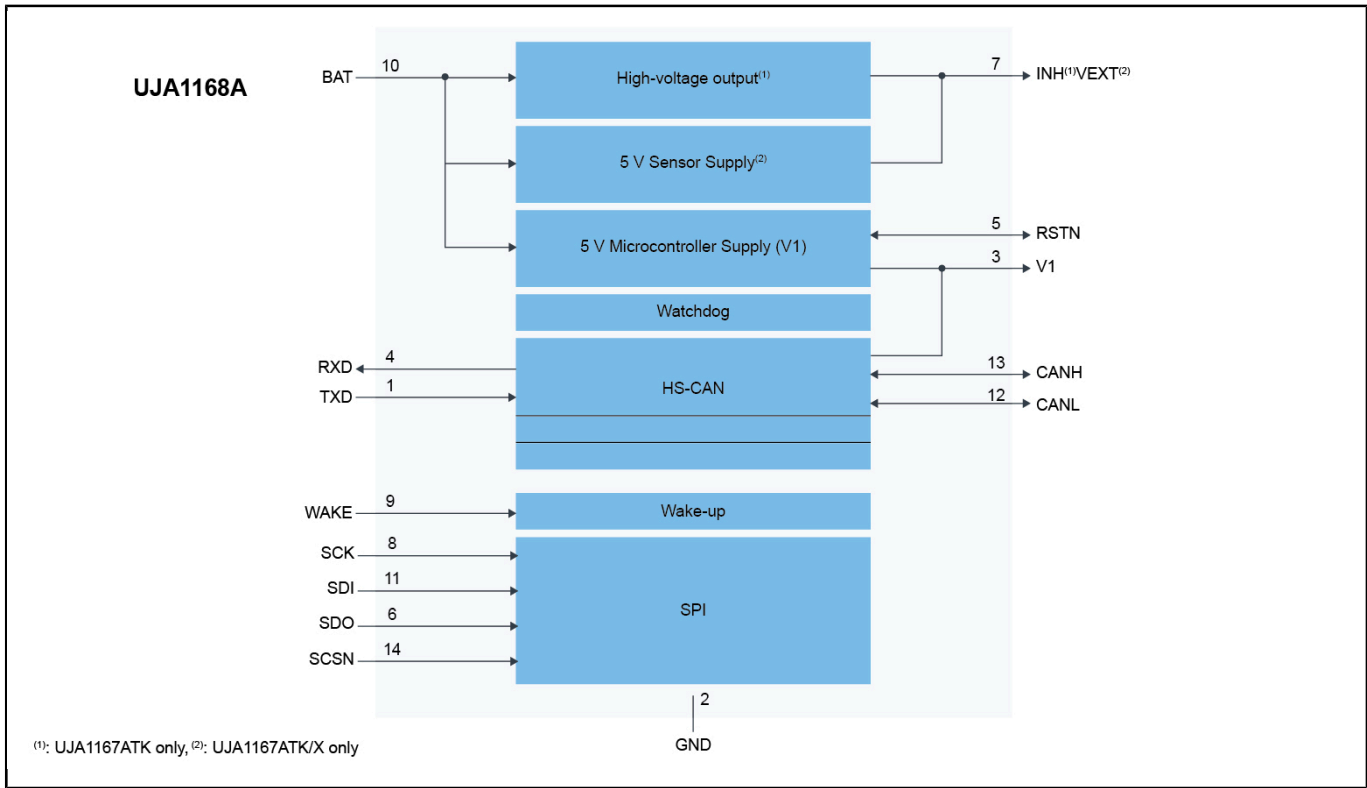

View additional information for [Mini High-Speed CAN System Basis Chip for Partial Networking](#).

Note: The information on this document is subject to change without notice.

www.nxp.com

NXP and the NXP logo are trademarks of NXP B.V. All other product or service names are the property of their respective owners. The related technology may be protected by any or all of patents, copyrights, designs and trade secrets. All rights reserved. © 2024 NXP B.V.