



BESS1500 Cell Monitoring Unit (CMU) with 18S Capability

RDBESS774A1EVB **NEW**

Preproduction

This page contains information on a preproduction product. Specifications and information herein are subject to change without notice. For additional information [contact support](#) or your sales representative.


Last Updated: Jun 7, 2024

Available to selected customers only (non-disclosure agreement (NDA) required), please [contact support](#) or your local sales representative for more information.

The CMU1 - RDBESS774A3EVB is a battery cell monitoring unit (CMU) reference design with electrical transport protocol link (ETPL) communication interface towards a BMU. It is ideal for rapid prototyping of a high-voltage battery energy storage system (BESS) hardware and software. This board contains one MC33774A analog front end (AFE) and it is equipped with a high-voltage transformer.

It can be used to monitor a battery module with up to 18 cells. There are in total 9 GPIO/Analog measurement inputs for temperature or other measurements. This board is part of the [RD-BESS1500BUN](#) reference design bundle.

RDBESS774A1EVB Block Diagram

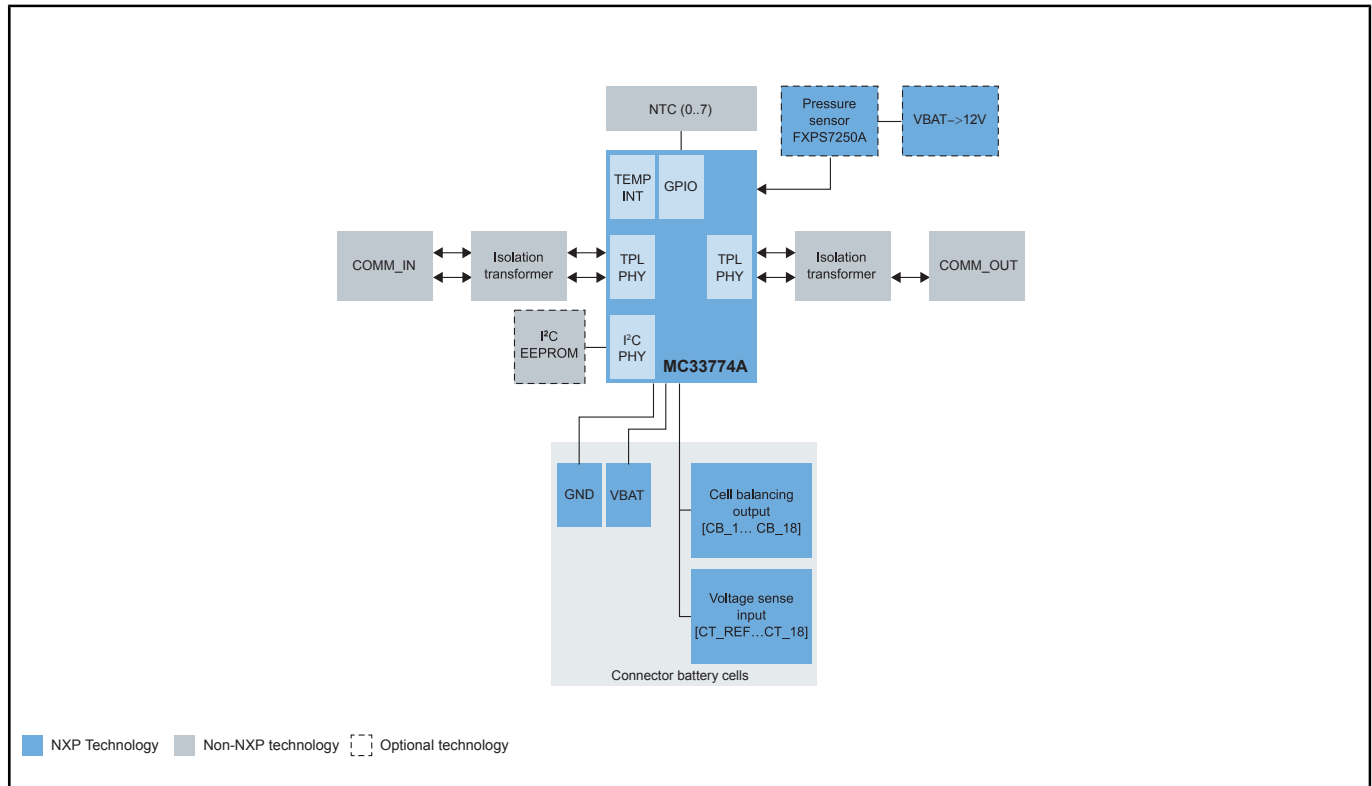

View additional information for [BESS1500 Cell Monitoring Unit \(CMU\) with 18S Capability](#).

Note: The information on this document is subject to change without notice.

www.nxp.com

NXP and the NXP logo are trademarks of NXP B.V. All other product or service names are the property of their respective owners. The related technology may be protected by any or all of patents, copyrights, designs and trade secrets. All rights reserved. © 2024 NXP B.V.