



Smart Car Access


Last Updated: Jan 15, 2025

NXP provides the technologies and system knowledge to enable secure, robust and scalable car access solutions.

NXP offers a Digital Key solution using our Secure Elements (SE) in combination with communication technologies including ultra-wideband (UWB), Bluetooth® Low Energy (Bluetooth LE) and near field communication (NFC). They help enable the unlocking and starting of a car with a smartphone, key fob or an NFC Smart Card holding a digital key, as well as the secure sharing of vehicle access with other mobile devices, an advanced capability for the secure car access ecosystem.


The solution leverages global standards from the Car Connectivity Consortium, IEEE, the Bluetooth SIG and the NFC Forum.

Car Block Diagram

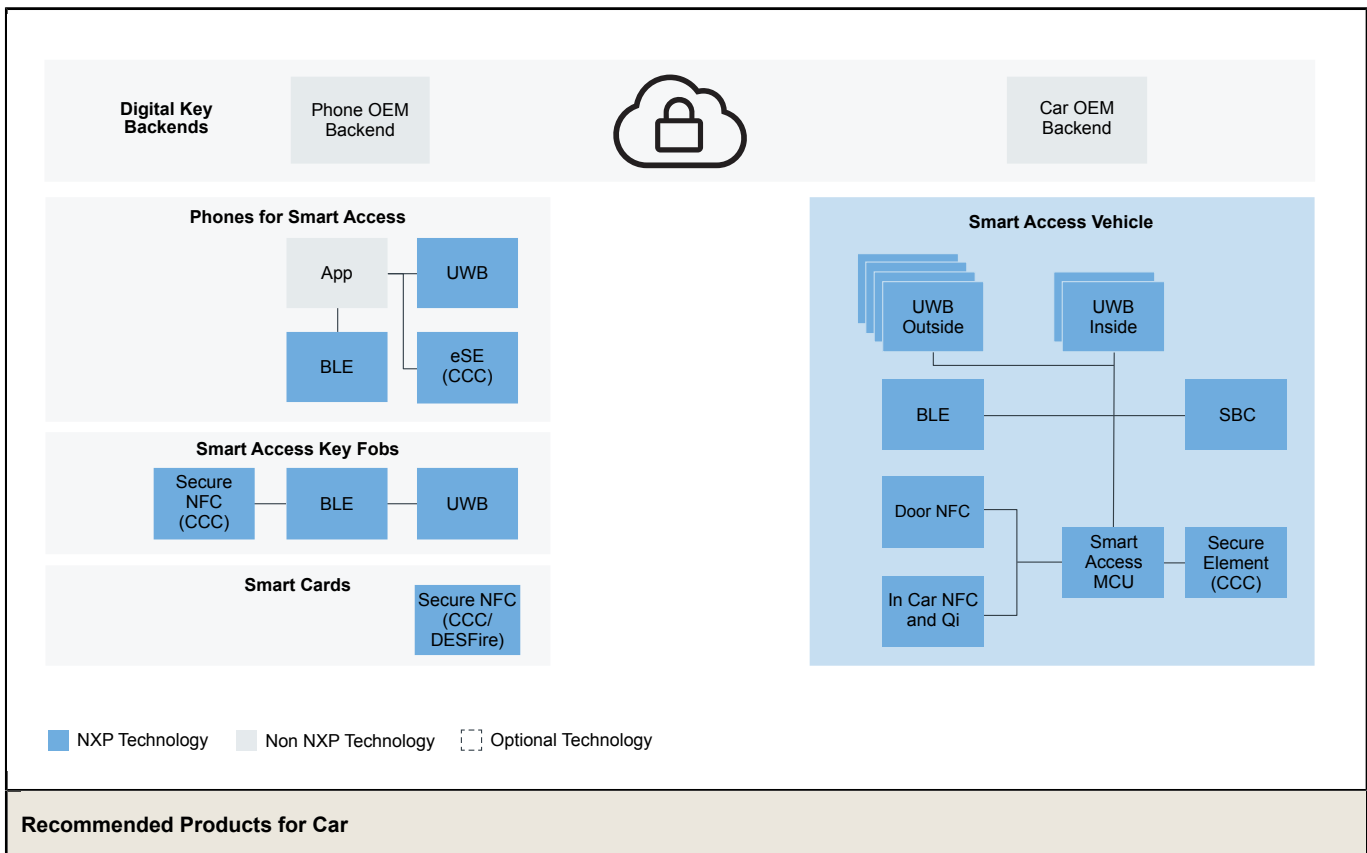

UWB	<ul style="list-style-type: none"> • Ultra-Wideband (UWB): Ultra wideband (UWB) • NCJ29D5: Trimention™ NCJ29D5: UWB IC for Automotive Applications • NCJ29D6: Trimention™ NCJ29D6: Secure UWB IC for Automotive Ranging and Radar Applications
UWB	<ul style="list-style-type: none"> • Ultra-Wideband (UWB): Ultra wideband (UWB) • NCJ29D6: Trimention™ NCJ29D6: Secure UWB IC for Automotive Ranging and Radar Applications • NCJ29D5: Trimention™ NCJ29D5: UWB IC for Automotive Applications
Bluetooth Low Energy	<ul style="list-style-type: none"> • KW45: KW45: 32-Bit Bluetooth® 5.3 Long-Range MCUs with CAN FD and LIN Bus Options, Arm® Cortex®-M33 Core
Door NFC	<ul style="list-style-type: none"> • NCx3320: Automotive-Grade NFC Frontend IC • NCx3321: NFC Forum-Compliant Frontend IC with Superior RF Performance for Automotive
In Car NFC and Qi Wireless Charging	<ul style="list-style-type: none"> • NCF3340AHN: Automotive Qualified NFC Controller with NCI Interface • NCx3321: NFC Forum-Compliant Frontend IC with Superior RF Performance for Automotive • MWCT2xxxS: MWCT2xxxS Microcontroller for Wireless charging Transmitter ICs
MCU	<ul style="list-style-type: none"> • Arm Processors: Arm®-Based Processors
Secure Element (CCC) for Smart Access Vehicle	<ul style="list-style-type: none"> • NCJ38A: Automotive-Qualified Embedded Secure Element (SE) • NCJ37x: Automotive Secure Element with Passive NFC, I²C and SPI Interfaces
SBC	<ul style="list-style-type: none"> • FS24: Safety Mini CAN FD SBC for Automotive Applications Fit for ASIL B


KeyFob Block Diagram

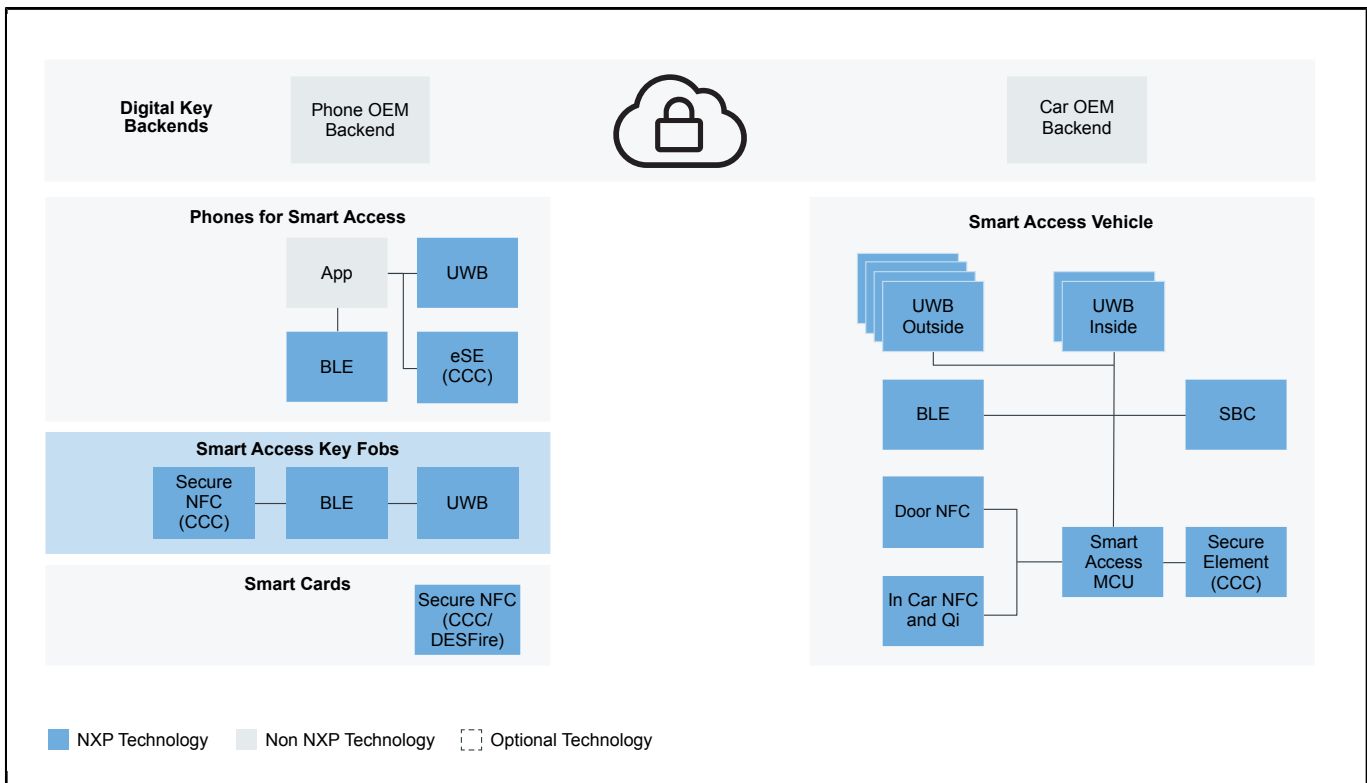

Recommended Products for KeyFob

Secure NFC (CCC) for Key Fobs	<ul style="list-style-type: none"> • Secure Car Access: Secure Car Access • NCJ37x: Automotive Secure Element with Passive NFC, I²C and SPI Interfaces
Bluetooth Low Energy	<ul style="list-style-type: none"> • KW45: KW45: 32-Bit Bluetooth[®] 5.3 Long-Range MCUs with CAN FD and LIN Bus Options, Arm[®] Cortex[®]-M33 Core
UWB KeyFob	<ul style="list-style-type: none"> • Ultra-Wideband (UWB): Ultra wideband (UWB) • NCJ29D5: Trimension™ NCJ29D5: UWB IC for Automotive Applications


Phone Block Diagram

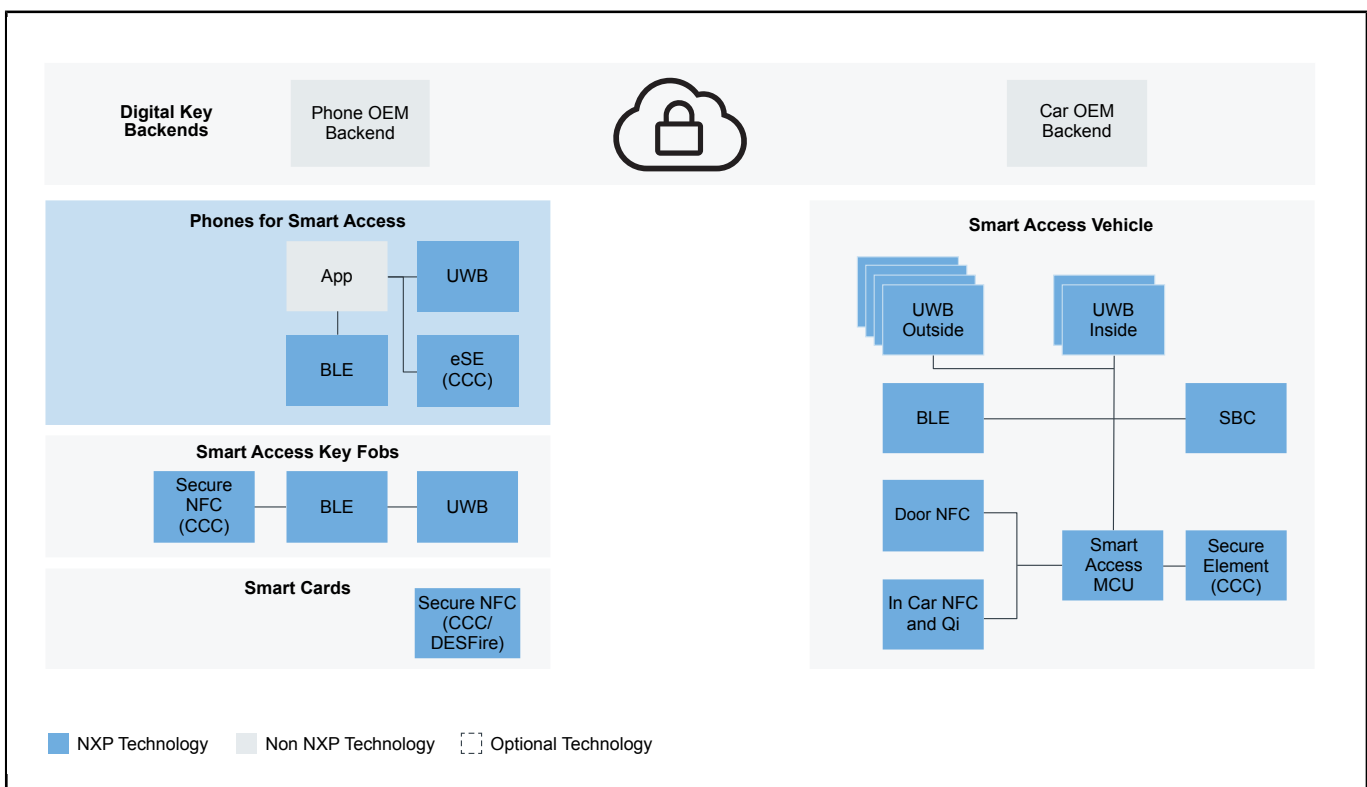

Recommended Products for Phone

UWB KeyFob	<ul style="list-style-type: none"> • Ultra-Wideband (UWB): Ultra wideband (UWB) • NCJ29D5: Trimension™ NCJ29D5: UWB IC for Automotive Applications
eSE (CCC) and NFC for Phones	<ul style="list-style-type: none"> • Mobile: Mobile
Bluetooth Low Energy	<ul style="list-style-type: none"> • KW45: KW45: 32-Bit Bluetooth[®] 5.3 Long-Range MCUs with CAN FD and LIN Bus Options, Arm[®] Cortex[®]-M33 Core

SmartCard Block Diagram

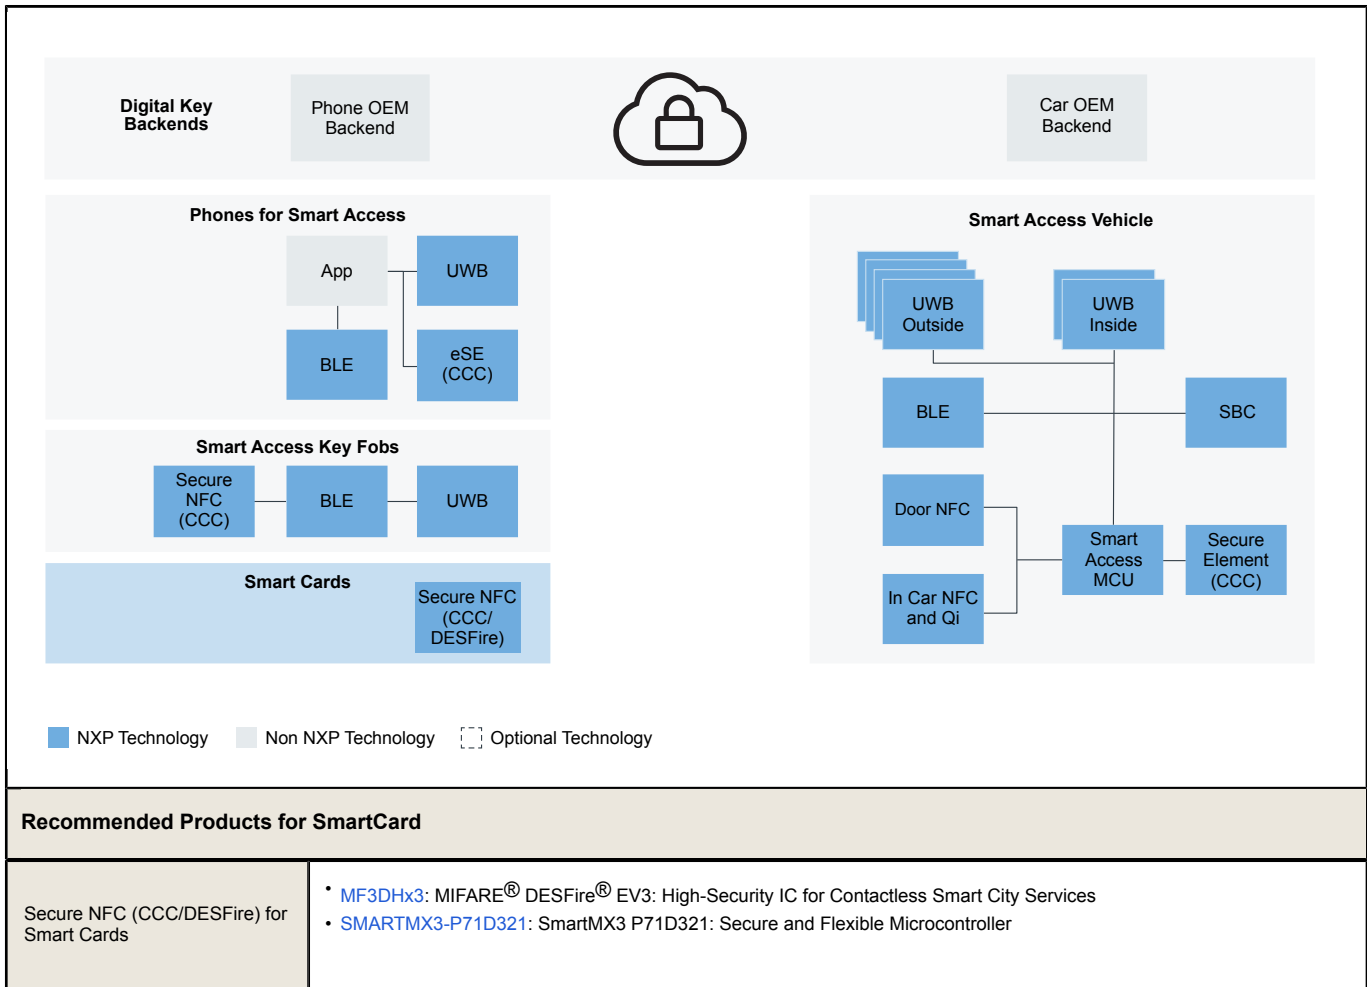

Recommended Products for SmartCard

Secure NFC (CCC/DESFire) for Smart Cards

- MF3DHx3: MIFARE® DESFire® EV3: High-Security IC for Contactless Smart City Services
- SMARTMX3-P71D321: SmartMX3 P71D321: Secure and Flexible Microcontroller

View our complete solution for [Smart Car Access](#).

Note: The information on this document is subject to change without notice.

www.nxp.com

NXP and the NXP logo are trademarks of NXP B.V. All other product or service names are the property of their respective owners. The related technology may be protected by any or all of patents, copyrights, designs and trade secrets. All rights reserved. © 2025 NXP B.V.